



COUNTERTOP DOUBLE BURNER (HOB) COOKTOP with StepXStep™ Controls



PERFORMANCE

The CookTek® Countertop Double Burner (Hob) Cooktop with StepXStep Controls is a portable countertop design with stainless steel housing and a glass-ceramic cooktop intended for use in commercial kitchens and restaurants. Each unit holds up to 64 step-by-step recipes that are programmed using an easy-to-use PC-based computer application. Automatic pan detection ensures maximum and efficient heating of any induction-compatible pan.*

Project _____

Item No. _____

Quantity _____

FEATURES

- Models available in 5,000 (2,500/burner); 6,000 (3,000/burner); 7,000 (3,500/burner) watts
- Portable design with stainless steel housing
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean high-temperature glass-ceramic top
- Automatic pan detection allows for instant energy transmission to pan
- Create step-by-step cooking instructions using a PC-based computer application
- Built-in USB port for easy upload – holds up to 64 recipes
- Touch controls with LCD display panel
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Unit automatically switches to Holding Mode while waiting for operator interaction
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- Integral fan keeps internal components cool
- Available in 100–120 VAC or 200–240 VAC, single phase
- Two-year advanced replacement warranty – U.S. and Canada



COUNTERTOP DOUBLE BURNER (HOB) COOKTOP

CERTIFICATIONS



*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

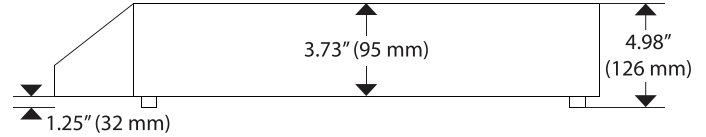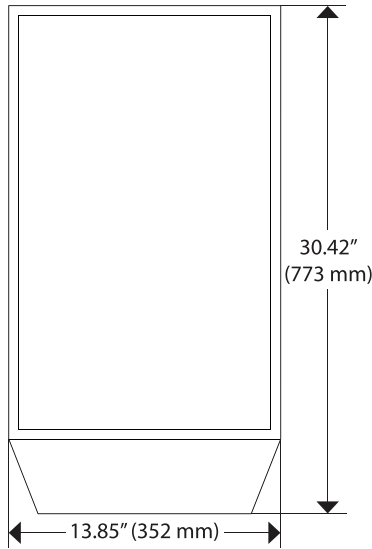

DIMENSIONS			
Full Unit Height	4.98"	126 mm	
Housing Height	3.73"	95 mm	
Full Unit Width	13.85"	352 mm	
Full Unit Depth	30.42"	773 mm	
Weight	31.2 lb.	14.2 kg	
Max Ambient Temperature	122°F	50°C	
WALL CLEARANCE			
Front	2"	51 mm	
Sides	2"	51 mm	
Rear	2"	51 mm	
SHIPPING INFORMATION			
Packaged Height	12"	305 mm	
Packaged Width	18"	457 mm	
Packaged Depth	36"	914 mm	
Packaged Weight	45 lb.	20.4 kg	
Item Class	250 NMFC #26710		
ELECTRICAL SPECIFICATIONS (SINGLE PHASE)			
UNITED STATES/CANADA (per burner)			
AC2502FG	625401	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	NEMA 6-30P
AC3002FG	625601	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	NEMA 6-50P
AC3502FG	625501	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W)	NEMA 6-50P
UK (per burner)			
AC2502FG	625402	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	IEC 309, 32A, 3-pin
AC3002FG	625602	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
AC3502FG	625502	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W)	IEC 309, 32A, 3-pin
INTERNATIONAL (per burner)			
AC2502FG	625403	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	IEC 309, 32A, 3-pin
AC3002FG	625603	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
AC3502FG	625503	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W)	IEC 309, 32A, 3-pin

AUSTRALIA			
AC2502FG	625404	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	56PA332, 32A, 250V
AC3002FG	625604	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	56PA332, 32A, 250V
AC3502FG	625504	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W)	56PA332, 32A, 250V
SOUTH AFRICA			
AC2502FG	625407	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	BS546, 16A, 250V
AC3002FG	625607	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
AC3502FG	625507	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W)	IEC 309, 32A, 3-pin
ISRAEL			
AC2502FG	625408	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	IEC 309, 32A, 3-pin
AC3002FG	625608	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
AC3502FG	625508	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W)	IEC 309, 32A, 3-pin
SAUDI ARABIA			
AC2502FG	625410	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	IEC 309, 32A, 3-pin
AC3002FG	625610	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
AC3502FG	625510	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W)	IEC 309, 32A, 3-pin

Dedicated circuit required for each installation.



NEMA 6-30P



56PA332, 32A, 250V



NEMA 6-50P



BS546, 16A, 250V



IEC 309, 32A, 3-pin