

Hand held Mixers **Bermixer PRO Turbo 650 W with Stainless Steel Tube (553mm)**



grip. Electronic speed variator with speed regulation regardless of the load. Electronic speed adjustment by pulse on + and - buttons. Maximum speed: 10000 rpm. Safety feature requires both hands to start the machine. Design for heavy duty usage: double fan system to cool down the motor. Visible and water proof (IP55) control panel to control speed levels and overload warning light. Shaft locking device avoids release during operation. Whisk accessory available as an option.

| TEM # | |
|---------|--|
| MODEL # | |
| NAME # | |
| SIS # | |
| AIA # | |

Main Features

- Parts in contact with food tube, blade, shaft can be completely dismounted without tools for easy cleaning.
- Designed to be used directly in stew pots up to 220 lt.
- Delivered with:

- -flat base motor
- -stainless steel tube
- -space saving storing wall support
- Anti-splash bell knife design.
- Tube, knife and whisks are dishwasher safe.
- Safety feature requires both hands to start the mixer (no volt release system).
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Overheating warning red indicator.
- Bayonet system makes fast and simple to exchange tools
- Productivity suitable for 50 to 300 meals per service.

Construction

- Power: 650 watts.
- Maximum speed 10000 rpm.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Smart speed control to ensure the right power according to the work load.
- Water protected motor unit (controls are IP55, IP34 throughout machine).

Included Accessories

1 of 553 mm stainless steel tube for portal PNC 650134 mixer bermixer


Optional Accessories

| 353 mm stainless steel tube for portal mixer bermixer | PNC 650132 🗅 |
|--|--------------|
| 453 mm stainless steel tube for portal mixer bermixer | PNC 650133 🗅 |
| 553 mm stainless steel tube for portal mixer bermixer | PNC 650134 🗅 |
| 653 mm stainless steel tube for portal mixer bermixer | PNC 650135 🗅 |
| • Adjustable rail for containers diam. 375 mm to 650 mm (to be used with 653294) | PNC 653292 🗅 |
| Holder to support portable mixer in containers (can be used only with tube attachment) | PNC 653294 🗅 |
| Dainforced whick for partiable mixer | |

TO SAMA



Hand held Mixers Bermixer PRO Turbo 650 W with Stainless Steel Tube (553mm)

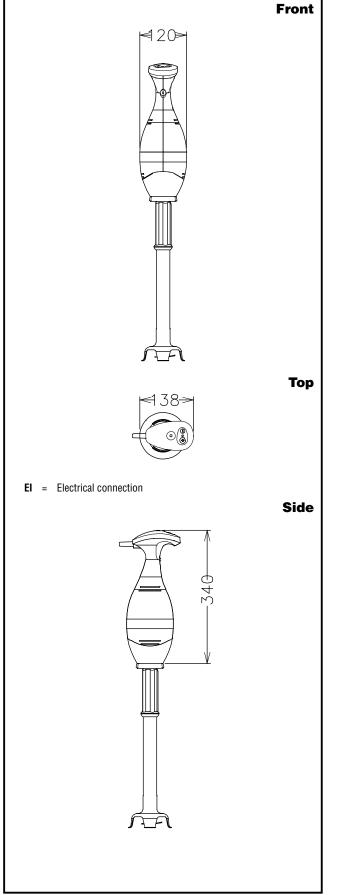

Electric

| Supply voltage: 600331 (DBP6555) Electrical power max.: Total Watts: | 220-240 V/1N ph/50/60 Hz 0.65 kW 0.65 kW |
|--|--|
| Capacity: | |
| Capacity (up to): | 220 liter |
| Key Information: | |
| External dimensions, Height: External dimensions, Width: External dimensions, Depth: Shipping weight: | 865 mm 138 mm 120 mm 4.8 kg |

Hand held Mixers Bermixer PRO Turbo 650 W with Stainless Steel Tube (553mm)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.