



### Dishwashing

EVO Generation - Concept

## GLASSWASHER CO-400

#### DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	<b>470,00</b>	<b>530,00</b>
Depth	mm	<b>520,00</b>	<b>680,00</b>
Height	mm	<b>720,00</b>	<b>890,00</b>
Weigth	Kg	<b>36,00</b>	<b>40,00</b>
Volumen	m3		<b>0,32</b>

#### ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		<b>2x2,5+T - 25 A</b>
230V - III		<b>3x1,5+T - 16 A</b>
400V - III+N		<b>4x1,5+T - 10 A</b>

#### WATER

Water consumption (lit/h)	<b>60,00</b>
Pressure (Kg/cm2)	<b>2 ÷ 4</b>

#### GAS

Not used

#### STEAM

Not used

#### AIR

Not used

#### LEVEL SOUND

(dB) **65,00**

#### GLASSWASHER CO-400

Front loading glasswasher - EVO Generation - Concept range.  
Basket size: 400 x 400 mm.  
Hourly production: 30 baskets/hour.  
Clearance (max ware height): 275 mm.  
Valid for dishes Ø 270 mm.  
Wash cycle: 120".

Made of stainless steel.  
The door has double skin.

Double rotating wash and rinse systems, above and below, made of stainless steel.

Wash pump: 260 W.  
Tank with 2.0 kW heating element.  
Tank capacity: 13 litres.

Boiler with 2.8 kW heating element.  
Boiler capacity: 4 litres.


Water consumption: 2 litres/rinse.  
Thermostatic temperature control: washing at 60 °C and rinsing at 90 °C.


Security thermostats.  
Built-in automatic rinse dispenser.  
Built-in non-return valve.  
Safety magnetic switch for door opening.  
Adjustable legs.

Total power: 3.06 kW.  
Dimensions: 470 x 520 x 720 mm.


Equipment: one basket 400x400, one supplement for dishes and one cutlery container.

<u>Connections points</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	210	50	65		
SOFT COLD WATER	305	50	65	3/4"	
DRAIN	370	50	65	30 x 25	



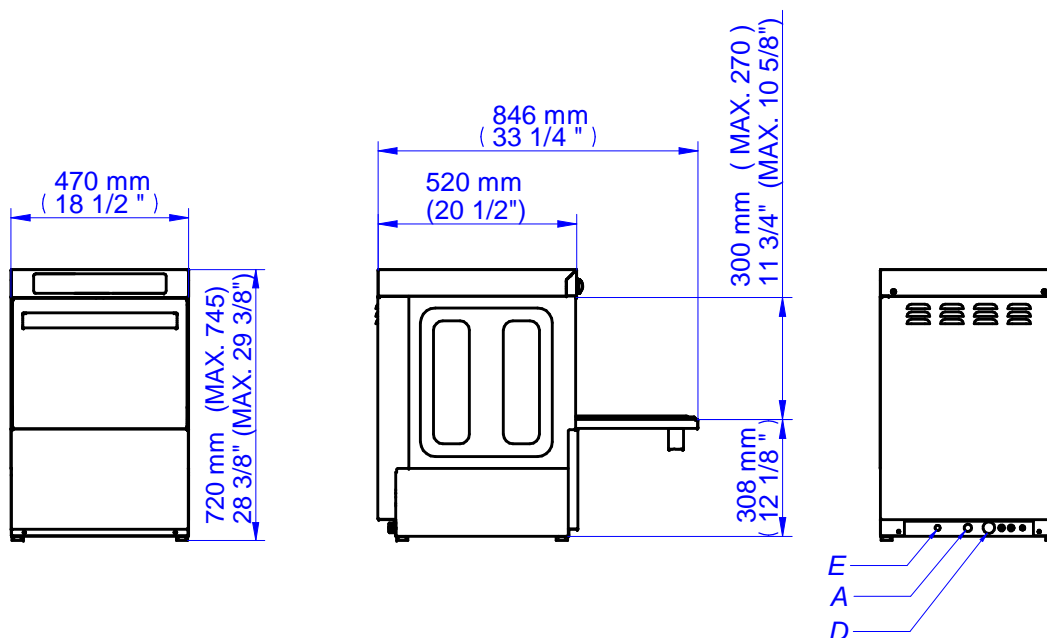

SOLO MODELOS "B"  
ONLY "B" MODELS  
SEULEMENT MODÈLES "B"

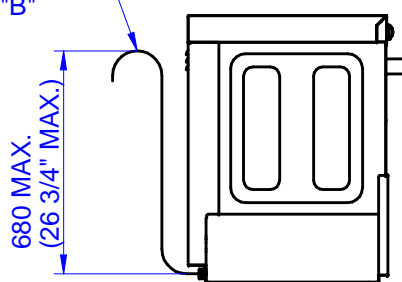

A: ENTRADA DE AGUA  
E: ALIMENTACIÓN ELÉCTRICA  
D: DESAGÜE

A: WATER INLET  
E: ELECTRICAL CONNECTION  
D: DRAIN

A: ARRIVÉE D'EAU  
E: CONNEXION ÉLECTRIQUE  
D: VIDANGE